

SEL-C431 EIA-232 Serial Cable

Male to Male Cable for connecting a DTE device to an SEL-9192 Modem.

Part Number:


C	4	3	1	-		
----------	----------	----------	----------	---	--	--

Length

Specify in Feet with Leading Zeros (Example: 5 Feet = 005) Max length 10 Feet

--	--	--	--	--	--	--

- (1) To verify your cable application, use the Cable Selector at <https://www.selinc.com/CableSelector/>.
- (2) Indoor Use Only, CM-Rated

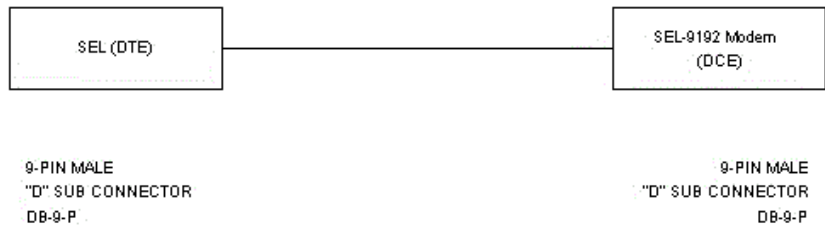

CABLE: 8 Conductor 22 AWG 7/30 Tinned Copper with PVC Jacket (Shielded: Alpha 1298C or equal)

CTS	8	BROWN	1	DCD
RXD	2	ORANGE	2	RXD (OUT)
TXD	3	RED	3	TXD (IN)
GND	5	GREEN	5	GND
RTS	7	BLACK	7	RTS
+5 VDC	1	YELLOW	8	+5 VDC (CTS)*
SHELL		SHIELD		NO CONNECTION

Comments: *Enable +5Vdc switch on the SEL-9192 Modem

Making Electric Power Safer, More Reliable, and More Economical®

SEL SCHWEITZER ENGINEERING LABORATORIES, INC.
 2350 NE Hopkins Court - Pullman, WA 99163 USA
 Phone: +1.509.332.1890 - Fax: +1.509.332.7990