



SEL-2245-411 Standard Current and Low-Voltage (LEA) Monitoring Module

The SEL-2245-411 provides standard current and low-voltage (LEA) monitoring inputs for the SEL Axion®. Within an Axion node, install as many as sixteen SEL-2245-411 Modules per system in any combination.

Front Panel



Figure 1 SEL-2245-411 4 CT/4 LEA Module

Mechanical Installation

Each SEL-2242 chassis/backplane has four or ten slots, labeled A–J. Slots B–J support the SEL-2245-411 Modules.



Figure 2 Notch for Module Alignment

To install an SEL-2245-411 Module, tip the top of the module away from the chassis, align the notch on the bottom of the module (shown in *Figure 2*) with the slot you want on the chassis, and place the module on the bottom lip of the chassis as *Figure 3* illustrates. The module is aligned properly when it rests entirely on the lip of the chassis.



Figure 3 Proper Module Placement

Next, carefully rotate the module into the chassis, making sure that the alignment tab fits into the corresponding slot at the top of the chassis (refer to *Figure 4*). Finally, press the module firmly into the chassis and tighten the chassis retaining screw.



Figure 4 Final Module Alignment

Input Connections

The SEL-2245-411 4 CT/4 LEA analog inputs include a dot next to the terminal number to indicate the positive convention. Refer to *Specifications* for ac analog input ratings and to *Figure 5* for terminal assignments. You can configure low-voltage or low-energy analog (LEA) inputs for 0–30 V and current transformer (CT) inputs for 0–22 A.

Configure inputs by adding a Fieldbus I/O connection for each module in ACCELERATOR RTAC® SEL-5033 Software. See the EtherCAT® portion in *Section 2: Communications* in the *SEL-5033 Software Instruction Manual* for details.

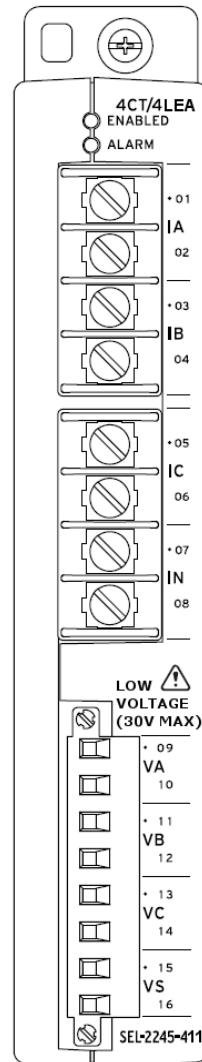


Figure 5 4CT/4LEA Analog Inputs

LED Indicators

The LEDs labeled **ENABLED** and **ALARM** are related to EtherCAT network operation. The green **ENABLED** LED illuminates when the module is operating normally on the network. The **ALARM** LED illuminates during network initialization or when there is a problem with the network.

CAUTION

Use supply wires suitable for 60°C (140°F) above ambient. See product or manual for ratings.

ATTENTION

Utilisez des fils d'alimentation appropriés pour 60°C (140°F) au-dessus ambiante. Voir le produit ou le manuel pour les valeurs nominales.

Specifications

Compliance

Designed and manufactured under an ISO 9001 certified quality management system

UL Listed to U.S. and Canadian safety standards (File E220228; NRAQ, NRAQ7)

CE Mark

General

Operating Temperature Range:

-40° to +85°C (-40° to +185°F)

Operating Environment

Pollution Degree:	2
Overtoltage Category:	II
Insulation Class:	1
Relative Humidity:	5%–95%, noncondensing
Maximum Altitude:	2000 m

AC Metering Inputs

Frequency:	50/60 Hz
Range:	45–65 Hz
Typical Accuracy:	±0.005 Hz above 500 mV
Worst-Case Accuracy:	±0.01 Hz above 500 mV
Phase Rotation:	ABC, ACB
Input Configuration:	3-Wire Delta, 4-Wire Wye
Update Interval	
Fundamental Metering:	200 Hz
RMS Metering:	5 Hz

Current Inputs Phase and Neutral

I_{NOM} :	1 A or 5 A (no settings required)
Measurement Range:	0.050–22 A Continuous 22–100 A Symmetrical for 25 s
Thermal Withstand Limit:	500 A for 1 s
Typical Accuracy:	±0.1% Fundamental @ f_{NOM} and > 0.6 A ±0.1% RMS @ f_{NOM} and > 0.6 A
Worst-Case Accuracy:	±2% ± 0.005 A Fundamental ±1% ± 0.005 A RMS

Angle

Range:	±180°
Typical Accuracy:	±0.1° Fundamental @ f_{NOM} and > 0.6 A
Worst-Case Accuracy:	±2° @ f_{NOM}
Burden:	< 0.1 VA @ I_{NOM}

Voltage Inputs

V_{NOM} :	1.5 V
Measurement Range:	30 Vac peak 0.05–22 Vac RMS
Maximum:	300 VL-N for 10 s (surge)
Typical Accuracy:	±0.1% @ f_{NOM} and > 50 mV RMS ±0.1% @ f_{NOM} and > 50 mV Fundamental
Worst-Case Accuracy:	±3% ± 1 mV @ f_{NOM} Fundamental/RMS

Angle

Range:	±180°
Typical Accuracy:	±0.1° @ f_{NOM} and > 50 mV
Worst-Case Accuracy:	±2° @ f_{NOM}
Burden:	< 0.1 VA

Sequence Components

Values:	I0, I1, I2, V0, V1, V2
Typical Accuracy	
Magnitude:	±0.2% @ f_{NOM}
Angle:	±0.2° @ f_{NOM} and $V > 50$ mV, $I > 0.6$ A
Worst-Case Accuracy	
Magnitude:	±3% @ f_{NOM} and $V > 50$ mV, $I > 0.6$ A
Angle:	±0.2° @ f_{NOM} and $V > 50$ mV, $I > 0.6$ A

Power and Power Factor (Per Phase and Three-Phase)

PA, PB, PC, 3P	
Typical Accuracy:	0.2% @ PF > 0.1
Worst-Case Accuracy:	2%
QA, QB, QC, 3Q	
Typical Accuracy:	0.2% @ PF < 0.9
Worst-Case Accuracy:	2%
SA, SB, SC, 3S	
Typical Accuracy:	0.2%
Worst-Case Accuracy:	2%
PFA, PFB, PFC, 3PF	
Typical Accuracy:	0.2% @ PF > 0.1
Worst-Case Accuracy:	2%

Triggered Waveform Recording

Sampling Rates:	1, 2, 4, 8, 24 kHz software selectable
Record Duration:	0.1-second increments from 0.5 s to specified maximum for each sample rate
Maximum Record Duration:	6 s at 24 kHz 18 s at 8 kHz 36 s at 4 kHz 72 s at 2 kHz 144 s at 1 kHz
Record Pretrigger:	0.05 s minimum to a maximum of (record length – 0.05) s
Waveform File Format:	COMTRADE (IEEE C37.111-1999 compliant)

Type Tests

Environmental Tests

Enclosure Protection:	IEC 60529:2001 + CRGD:2003 IP3X excluding the terminal blocks
Vibration Resistance:	IEC 60255-21-1:1988 Vibration Endurance, Severity: Class 2 Vibration Response, Severity: Class 2
Shock Resistance:	IEC 60255-21-2:1988 Bump Test, Severity: Class 1 Shock Withstand, Severity: Class 1 Shock Response, Severity: Class 2
Seismic:	IEC 60255-21-3:1993 Quake Response, Severity: Class 2

Cold:	IEC 60068-2-1:2007 -40°C, 16 hours
Dry Heat:	IEC 60068-2-2:2007 +85°C, 16 hours
Damp Heat, Cyclic:	IEC 60068-2-30:2005 25°C to 55°C, 6 cycles, 95% relative humidity

Dielectric Strength and Impulse Tests

Impulse:	IIEC 60255-5:2000 IEEE C37.90-2005 Severity Level: 0.5 Joule, 5 kV CT/PT inputs
Dielectric (HiPot):	IEC 60255-5:2000 IEEE C37.90-2005 Severity Level: 2500 Vac CT/PT inputs for 1 minute

RFI and Interference Tests

EMC Immunity

Electrostatic Discharge Immunity:	IEEE C37.90.3-2001 IEC 60255-22-2:2008 IEC 61000-4-2:2008 Severity Level: 8 kV contact discharge 15 kV air discharge
Radiated RF Immunity:	IEEE C37.90.2-2004 Severity Level: 35 V/m IEC 61000-4-3:2008 IEC 60255-22-3:2007 Severity Level: 10 V/m
Digital Radio Telephone RF Immunity:	ENV 50204:1995 Severity Level: 10 V/m at 900 MHz and 1.89 GHz
Conducted RF Immunity:	IEC 60255-22-6:2001 IEC 61000-4-6:2008 Severity Level: 10 Vrms
Surge Immunity:	IEC 60255-22-5:2008 IEC 61000-4-5:2005 Severity Level: 1 kV Line to Line, 2 kV Line to Earth (202 ms filter on RMS voltages and frequencies, 33 ms filter on fundamental frequencies; cable length \leq 2 m)
Fast Transient, Burst Immunity:	IEC 60255-22-4:2008 IEC 61000-4-4:2011 Severity Level: Class A: 4 kV, 5 kHz; 2 kV, 5 kHz on communications ports (cable length \leq 2 m)
Magnetic Field Immunity:	IEC 61000-4-8:2009 Severity Level: 1000 A/m for 3 seconds, 100 A/m for 1 minute IEC 61000-4-9:2001 Severity Level: 1000 A/m IEC 61000-4-10:2001 Severity Level: 100 A/m

Surge Withstand Capability Immunity:	IEC 60255-22-1:2007 Severity Level: 2.5 kV common-mode 1.0 kV differential-mode IEEE C37.90.1-2002 Severity Level: 2.5 kV Oscillatory 4.0 kV Fast Transient (cable length \leq 2 m)
Oscillatory Waves Immunity:	IEC 61000-4-12:2006 Severity Level: Ring Wave: 2 kV common, 1.0 kV differential Oscillatory: 2.5 kV common, 1.0 kV differential (cable length \leq 2 m)
Common Mode Disturbance Immunity:	IEC 61000-4-16:2002 Frequency: 0 Hz to 150 Hz Severity Level: Level 4, Segment 4: 30 Vrms open-circuit, 15 kHz–150 kHz (cable length \leq 2 m)

Emissions

Radiated and Conducted Emissions:	IEC 60255-25:2000 Severity Level: Class A
-----------------------------------	--

© 2018 by Schweitzer Engineering Laboratories, Inc. All rights reserved.

All brand or product names appearing in this document are the trademark or registered trademark of their respective holders. No SEL trademarks may be used without written permission. SEL products appearing in this document may be covered by U.S. and Foreign patents.

Schweitzer Engineering Laboratories, Inc. reserves all rights and benefits afforded under federal and international copyright and patent laws in its products, including without limitation software, firmware, and documentation.

The information in this document is provided for informational use only and is subject to change without notice. Schweitzer Engineering Laboratories, Inc. has approved only the English language document.

This product is covered by the standard SEL 10-year warranty. For warranty details, visit selinc.com or contact your customer service representative.

EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

SCHWEITZER ENGINEERING LABORATORIES, INC.

2350 NE Hopkins Court • Pullman, WA 99163-5603 U.S.A.
Tel: +1.509.332.1890 • Fax: +1.509.332.7990
selinc.com • info@selinc.com

